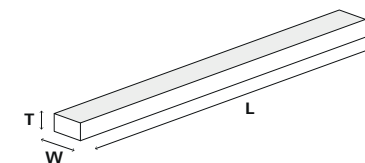


Solid Beech:

Lightly steamed | Calibrated thickness | Homogeneous dried to 7-9% KD | Cut-to-size after kiln drying

Gradings:

In five sortings available: AAA | AAX | CCC | CCX | GGG

Tolerances:Thickness: ± 0.3 mm | Width: ± 0.5 mm | Length: ± 1 mm per 1m**Overview** – Our standard dimensions in stock for you to choose from:

width \ length	42 mm		52 mm		56 mm		62 mm		68 mm		75 mm		80 mm		100 mm		125 mm		
	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	Pcs.	Vol. [m ³]	
3,000 mm	1040	3.4	800	3.2	800	3.5	720	3.5	640	3.4	560	3.3	560	3.5	400	3.1	only on request		
2,750 mm		3.1		3.0		3.2		3.2		3.1		3.0		2.9		2.9			
2,700 mm		3.1		2.9		3.1		3.1		2.9		2.9		3.1		2.8	2.8		
2,600 mm		3.0		2.8		3.0		3.0		2.9		2.8		2.8		3.0	2.7	2.7	
2,500 mm		2.8		2.7		2.9		2.9		2.8		2.7		2.7		2.9	2.6	2.6	
2,400 mm		2.7		2.6		2.8		2.8		2.7		2.6		2.6		2.8	2.5	2.5	
2,300 mm		2.6		2.5		2.7		2.7		2.6		2.5		2.5		2.7	2.4	2.4	
2,250 mm		2.6		2.4		2.6		2.6		2.5		2.5		2.5		2.6	2.3	2.3	
2,200 mm		2.5		2.4		2.6		2.6		2.5		2.4		2.4		2.6	2.3	2.3	
2,100 mm		2.4		2.3		2.4		2.4		2.4		2.4		2.4		2.3	2.2	2.2	
2,050 mm		2.3		2.2		2.4		2.4		2.4		2.4		2.3		2.2	2.4	2.1	2.1
2,000 mm		2.3		2.2		2.3		2.3		2.3		2.3		2.3		2.2	2.3	2.1	2.1
1,900 mm		2.2		2.1		2.2		2.2		2.2		2.2		2.1		2.1	2.2	2.0	2.0
1,800 mm		2.0		1.9		2.1		2.1		2.1		2.1		2.0		2.0	2.1	1.9	1.9
1,700 mm		1.9		1.8		2.0		2.0		2.0		2.0		1.9		1.9	2.0	1.8	1.8
1,600 mm		1.8		1.7		1.9		1.9		1.9		1.9		1.8		1.7	1.9	1.7	1.7
1,500 mm	1.7	1.6	1.7	1.7	1.7	1.7	1.7	1.6	1.7	1.6	1.6								
500 mm	2160	1.2	1680	1.1	1600	1.2	1440	1.2	1280	1.1	1200	1.2	1120	1.2	880	1.1	720	1.2	
450 mm		1.1		1.0		1.0		1.0		0.9		0.9		0.9		0.9			
400 mm		0.9		0.9		0.9		0.9		0.8		0.8		0.8		0.8		0.8	
350 mm		0.8		0.8		0.8		0.8		0.8		0.8		0.8		0.8		0.8	
300 mm	3240	1.1	2520	1.0	2400	1.0	2160	1.0	1920	1.0	1800	1.1	1680	1.0	1320	1.0	1080	1.1	
250 mm		0.9		0.9		0.9		0.9		0.8		0.8		0.9		0.9			
200 mm		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9	0.9
Cuts for finger-joints 200 - 500 mm	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	

You are looking for customized widths and lengths, please ask for a quote!

For grading description please see: my.pollmeier.com/cuttingqualitieswww.pollmeier.com | sales@pollmeier.com | +49 36926 945 163