


Overview – Our standard dimensions AAA and CCC in stock for you to choose from:

width \ length	42 mm		52 mm		56 mm		62 mm		68 mm		75 mm		80 mm		100 mm		125 mm											
	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]	Pcs.	Vol. [m³]										
3,000 mm	1040	3.4	840	3.4	800	3.5	720	3.5	640	3.4	600	3.3	560	3.5	440	3.4	320	only on request										
2,750 mm		3.1		3.1		3.2		3.2		3.1		3.0		3.2		3.1		2.9	3.0	3.1	2.9	3.1	2.9	3.1	2.9	2.9	2.9	
2,700 mm		3.1		3.1		3.1		3.1		3.1		3.1		3.1		3.1		3.1	3.1	2.9	2.9	3.1	3.0	2.9	3.1	2.9	2.8	
2,600 mm		3.0		3.0		3.0		3.0		3.0		3.0		3.0		2.9		2.9	2.9	2.8	2.8	3.0	3.0	2.9	3.0	2.9	2.7	
2,500 mm		2.8		2.8		2.8		2.8		2.9		2.9		2.9		2.9		2.8	2.8	2.7	2.7	2.9	2.9	2.9	2.9	2.9	2.9	2.6
2,400 mm		2.7		2.7		2.7		2.7		2.8		2.8		2.8		2.8		2.7	2.7	2.6	2.6	2.8	2.8	2.7	2.7	2.7	2.7	2.5
2,300 mm		2.6		2.6		2.6		2.6		2.7		2.7		2.7		2.7		2.6	2.6	2.5	2.5	2.7	2.7	2.6	2.6	2.6	2.6	2.4
2,250 mm		2.6		2.6		2.6		2.6		2.6		2.6		2.6		2.6		2.5	2.5	2.5	2.5	2.6	2.6	2.6	2.6	2.6	2.6	2.3
2,200 mm		2.5		2.5		2.5		2.5		2.6		2.6		2.6		2.6		2.5	2.5	2.4	2.4	2.6	2.6	2.5	2.5	2.5	2.5	2.3
2,100 mm		2.4		2.4		2.4		2.4		2.4		2.4		2.4		2.4		2.4	2.4	2.3	2.3	2.4	2.4	2.4	2.4	2.4	2.4	2.2
2,050 mm		2.3		2.3		2.3		2.3		2.4		2.4		2.4		2.4		2.3	2.3	2.2	2.2	2.4	2.4	2.3	2.3	2.3	2.3	2.1
2,000 mm		2.3		2.3		2.3		2.3		2.3		2.3		2.3		2.3		2.3	2.3	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.1
1,900 mm		2.2		2.2		2.2		2.2		2.2		2.2		2.2		2.2		2.1	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.2	2.2	2.0
1,800 mm		2.0		2.0		2.0		2.0		2.1		2.1		2.1		2.1		2.0	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	1.9
1,700 mm		1.9		1.9		1.9		1.9		2.0		2.0		2.0		2.0		1.9	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0	1.8
1,600 mm		1.8		1.8		1.8		1.8		1.9		1.9		1.9		1.9		1.8	1.8	1.7	1.7	1.9	1.9	1.9	1.9	1.9	1.9	1.7
1,500 mm	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	1.6									
500 mm	2080	1.1	1680	1.1	1600	1.2	1440	1.2	1280	1.1	1200	1.2	1120	1.2	880	1.1	640	1.0	1.0									
450 mm		1.0		1.0		1.0		1.0		0.9		0.9		1.1		1.0		0.9	0.9	1.0	0.9	0.9	1.0	0.9	0.9	0.9		
400 mm		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8
350 mm		0.8		0.8		0.8		0.8		0.8		0.8		0.8		0.8		0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.7
300 mm	3120	1.0	2520	1.0	2400	1.0	2160	1.0	1920	1.0	1800	1.1	1680	1.0	1320	1.0	960	0.9	0.9									
250 mm		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8		
200 mm		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9		0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8
Cuts for finger-joints 200 - 500 mm	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	-	0.9	0.9									

Solid Beech: Lightly steamed | Calibrated thickness | Homogeneous dried to 7-9% KD | Cut-to-size after kiln drying
Tolerances: Thickness: ±0.3 mm | Width: ±0.5 mm | Length: ±1 mm per 1m
Thickness: 23.8 mm (Invoiced thickness: 26 mm)

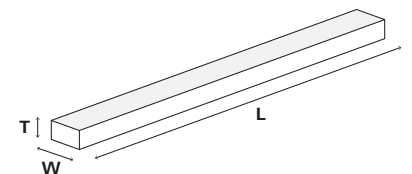

You are looking for customized widths and lengths, please ask for a quote!
 For grading description please see: my.pollmeier.com/cuttingqualities