




Pollmeier

STANDARD RIPPED-TO-WIDTH

Combine cost effectiveness & flexibility
in dimensions

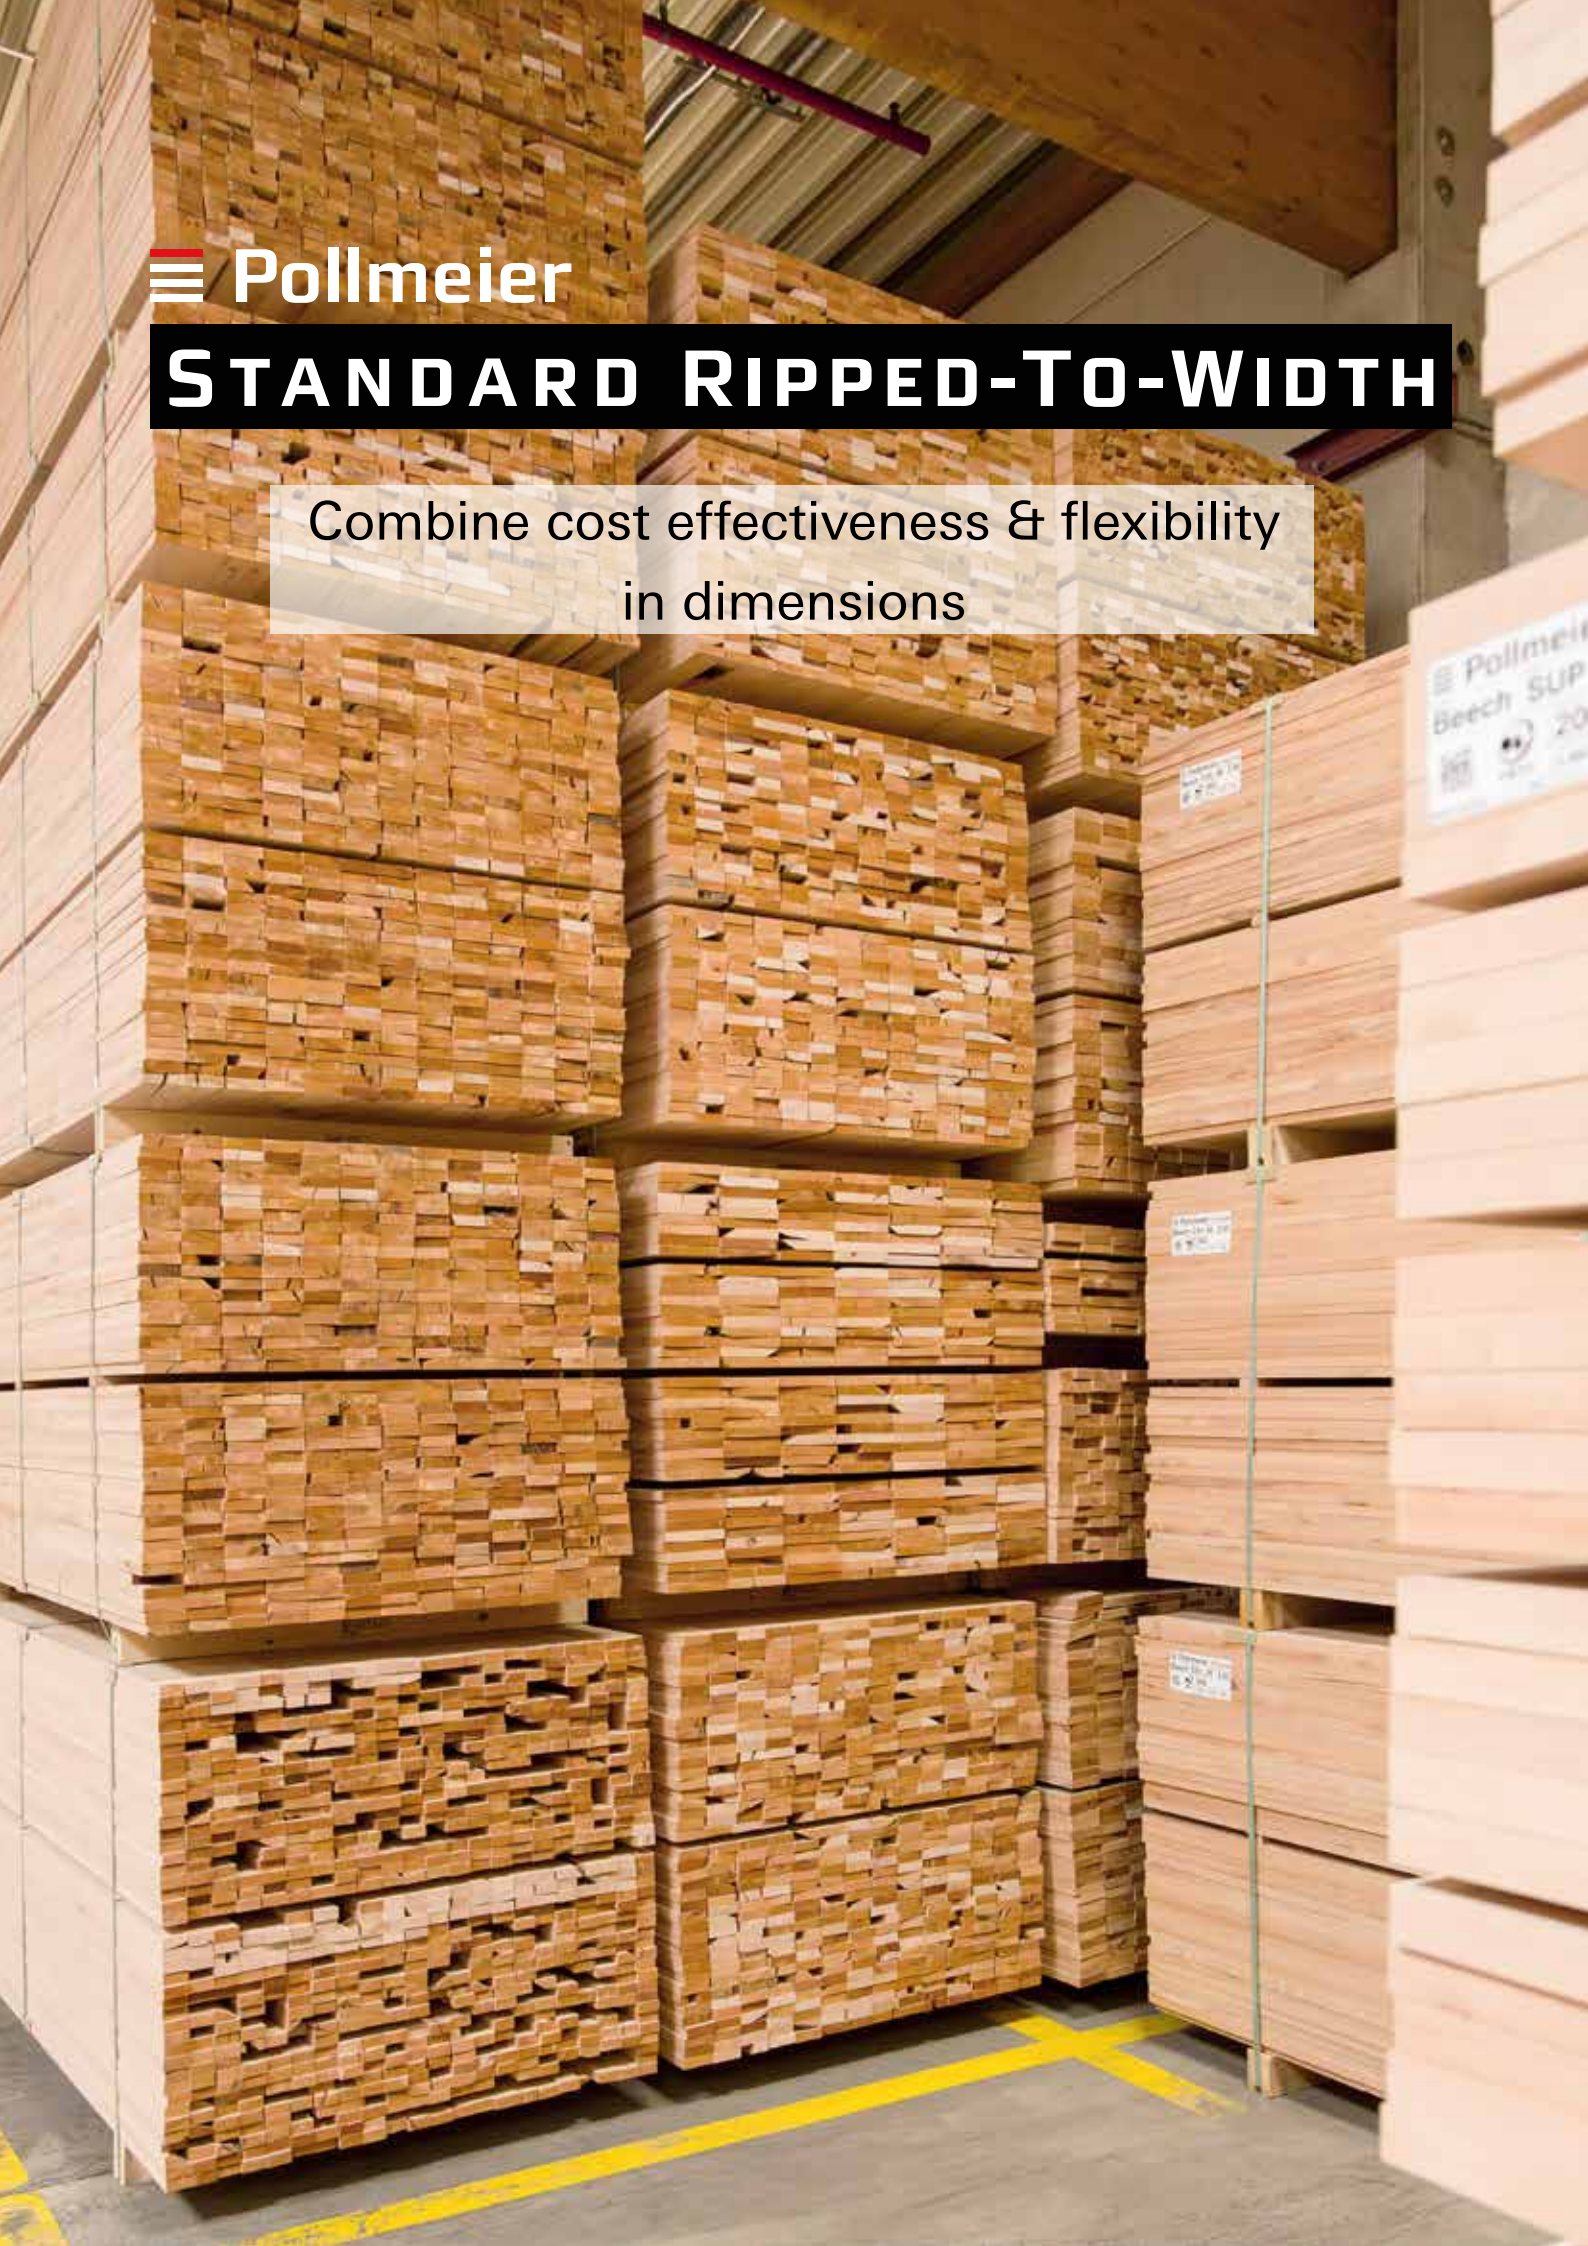




STANDARD RIPPED-TO-WIDTH – Combine cost effectiveness & flexibility in dimensions

Reduce costs by not having ripping waste.

Additionally save on production and transport costs.

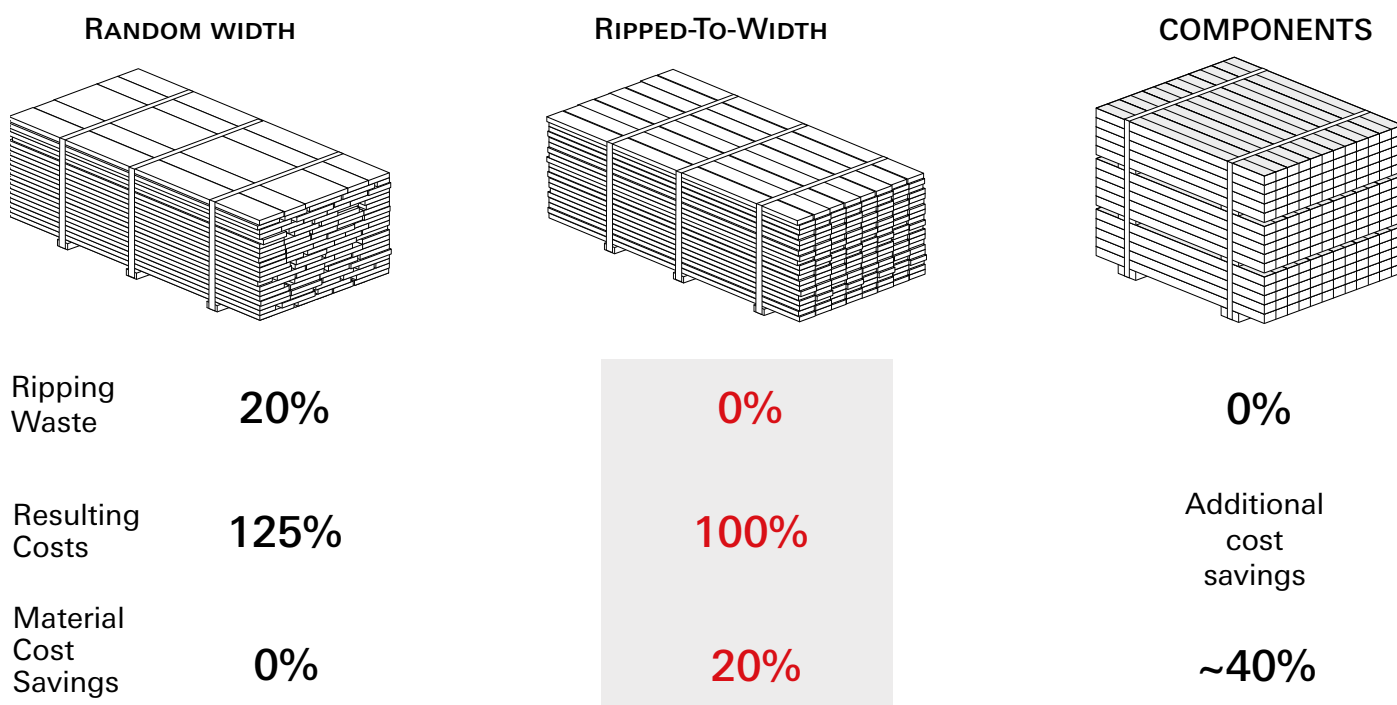

Overview – STANDARD RIPPED-TO-WIDTH (RTW) – Grades & Dimensions

Thickness: 23.8 mm (Tolerance 0.3 mm, 26 mm invoiced)

Length: 2.45 m, 3.05 m, 3.35 m (Plus 2 - 3 cm, occasional trimms allowed (approx. 10%))

Grades	42 mm	48 mm	50 mm	54 mm	68 mm	80 mm	100 mm
Superior	x			x	x	x	x
Superior Colour	x			x	x	x	x
Superior Colour Redheart	x			x	x	x	x
Cabinet	x			x	x	x	
Cabinet Colour	x			x	x	x	
Prime Frame		x	x				

Pollmeier Standard


- Lightly steamed
- Carefully kiln-dried to 7 – 9 % moisture content
- Conditioned
- Pre-sanded on both faces


STANDARD RIPPED-TO-WIDTH

Superior

FRONT

- **Thickness:**
23.8 mm
- **Width:**
42 mm, 54 mm,
68 mm, 80 mm,
100 mm
- **Lengths:**
2.45 m, 3.05 m,
3.35 m
- minimum yield 90%
at the minimum
clear cutting length
of
2.10 m for 2.45 m
2.40 m for 3.05 m
2.70 m for 3.35 m

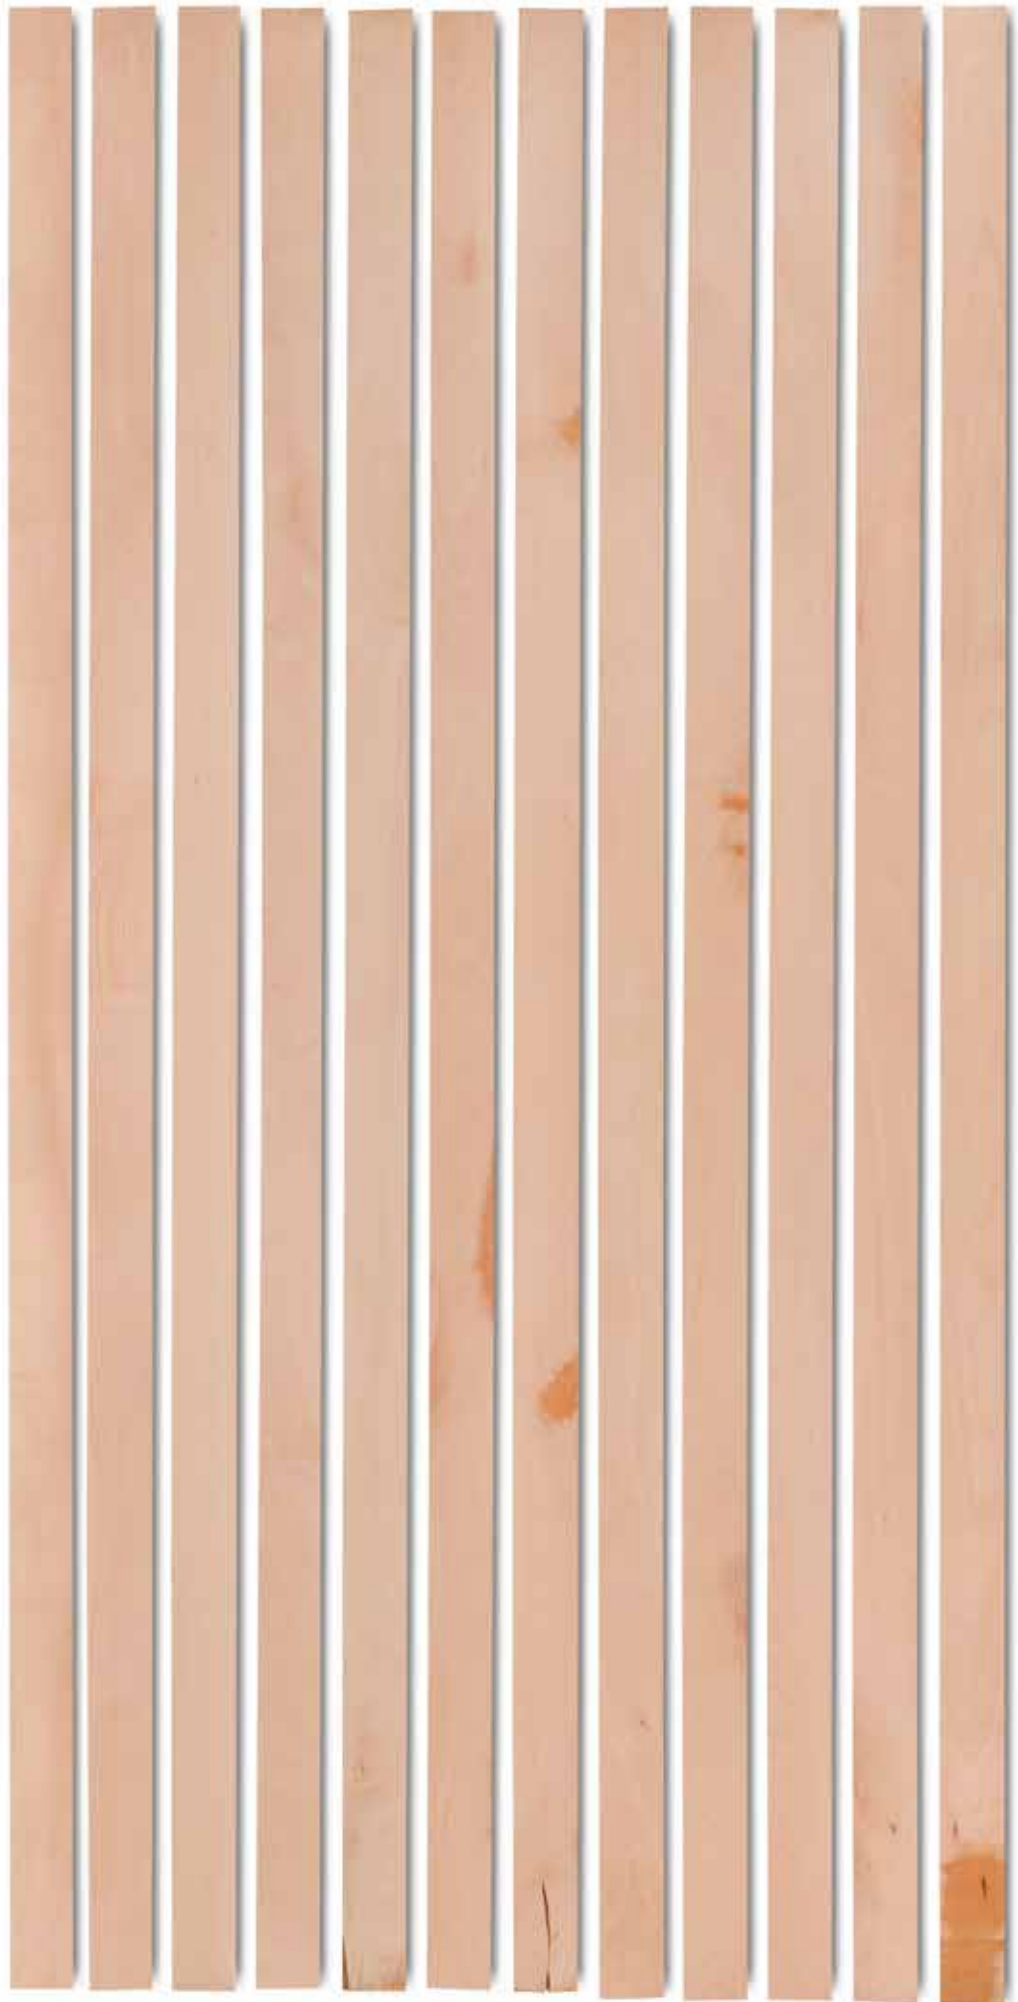

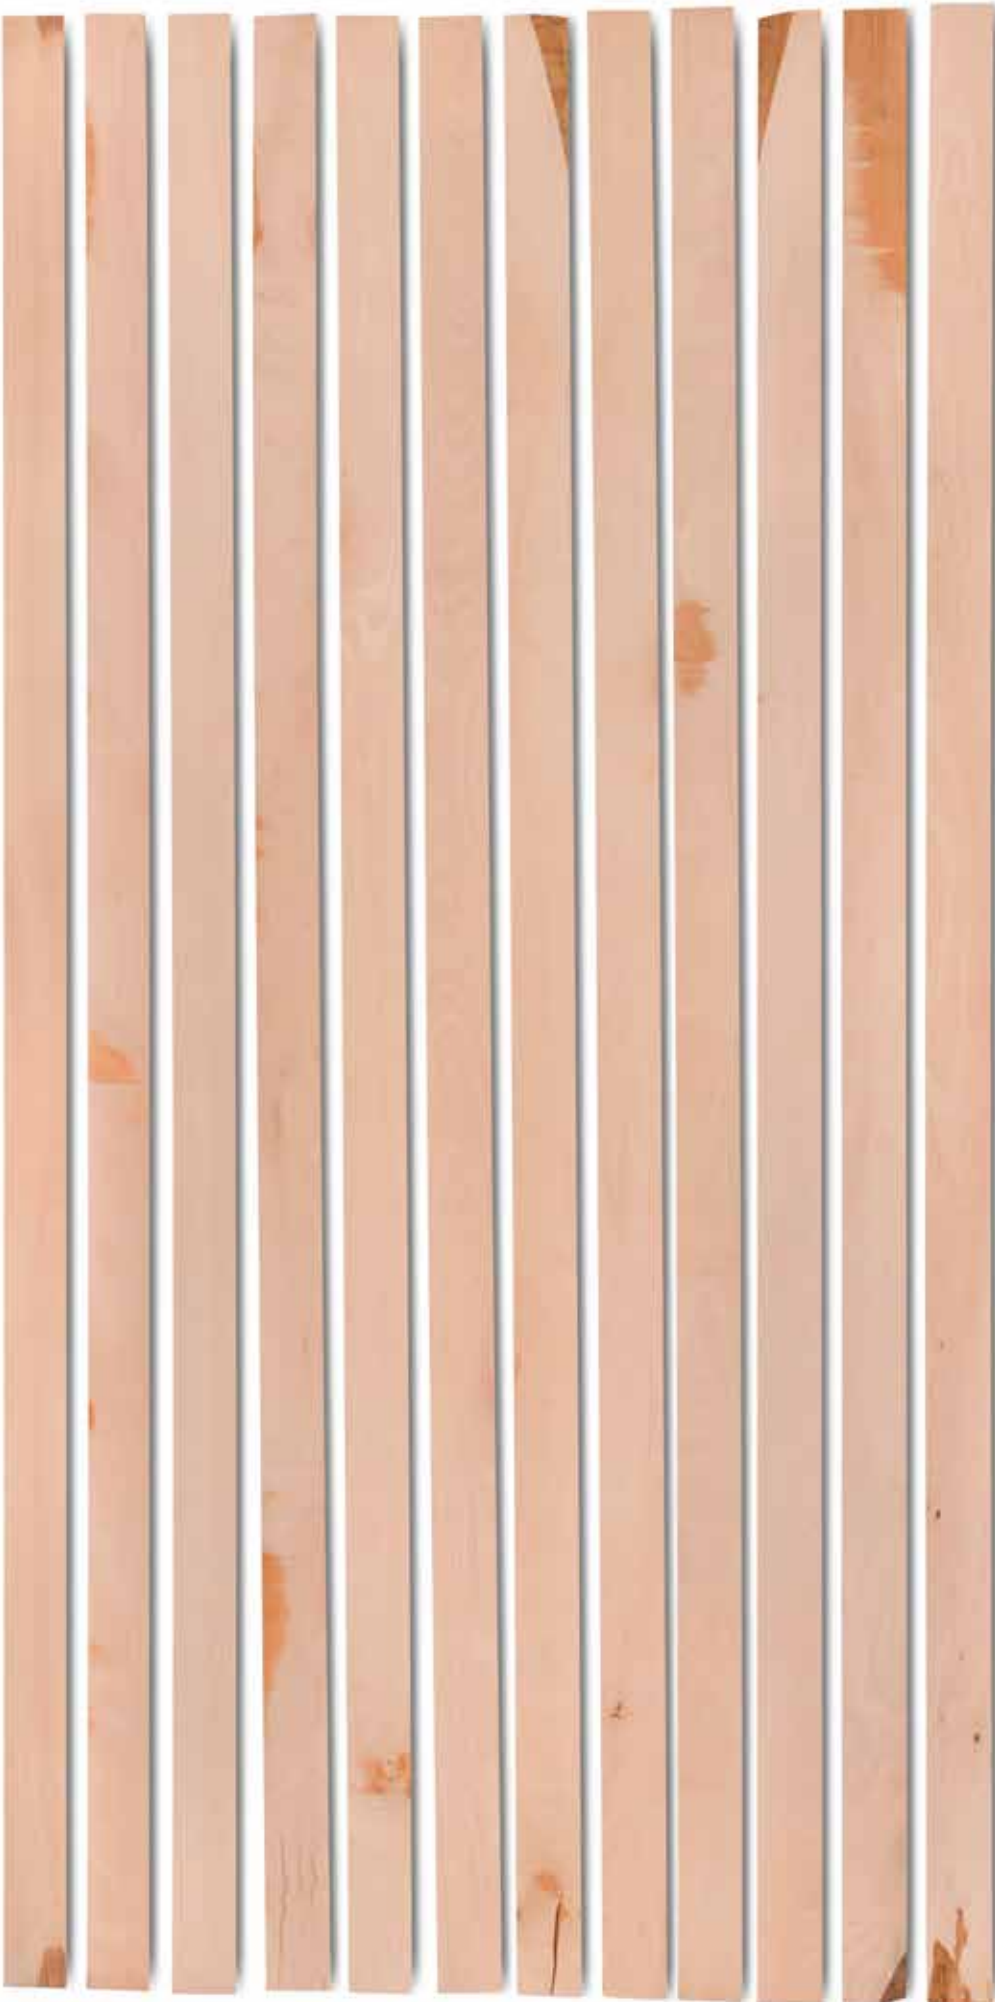



STANDARD RIPPED-TO-WIDTH

Superior Colour

FRONT

- Thickness:
23.8 mm
- Width:
42 mm, 54 mm,
68 mm, 80 mm,
100 mm
- Lengths:
2.45 m, 3.05 m,
3.35 m
- minimum yield 90%
at the minimum
clear cutting length
of
2.10 m for 2.45 m
2.40 m for 3.05 m
2.70 m for 3.35 m
- colour no defect

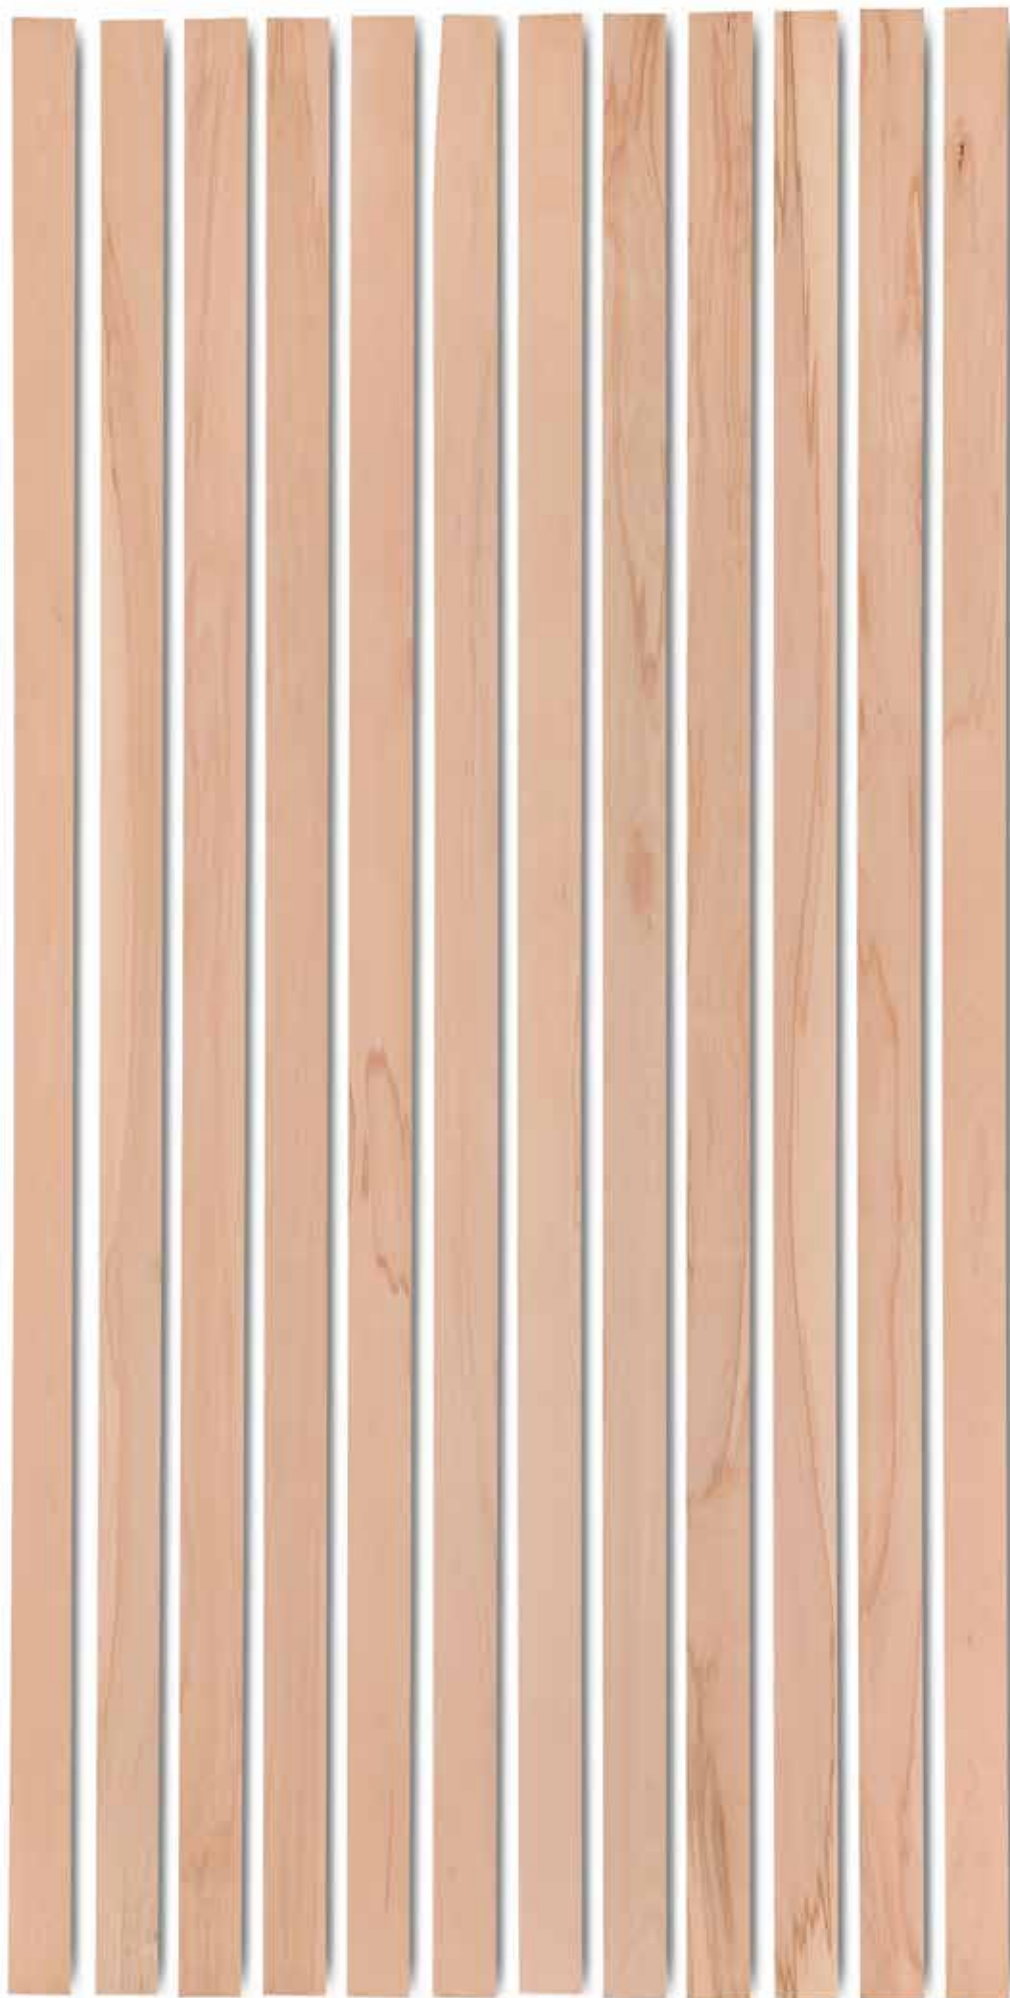

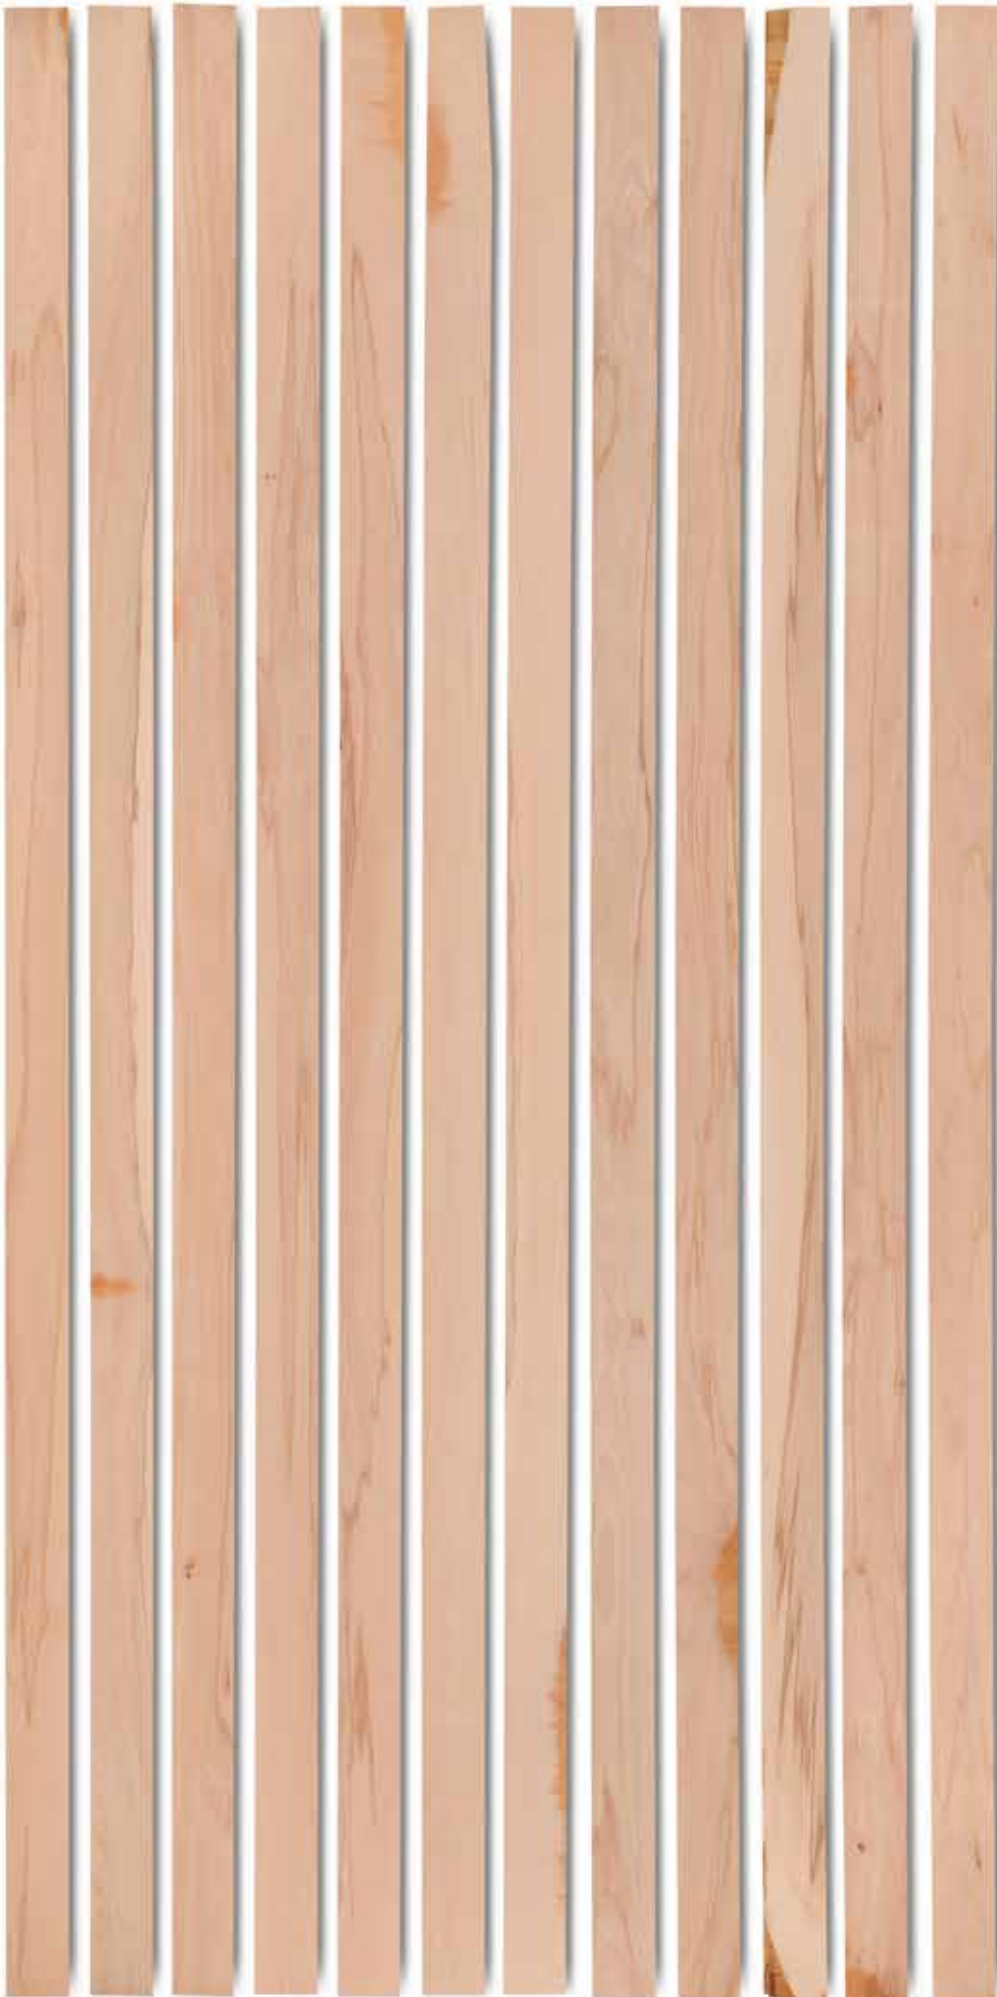

STANDARD RIPPED-TO-WIDTH

Superior Colour Redheart

FRONT

- **Thickness:**
23.8 mm
- **Width:**
42 mm, 54 mm,
68 mm, 80 mm,
100 mm
- **Lengths:**
2.45 m, 3.05 m,
3.35 m
- minimum yield 90%
at the minimum
clear cutting length
of
2.10 m for 2.45 m
2.40 m for 3.05 m
2.70 m for 3.35 m
- colour no defect
with redheart





STANDARD RIPPED-TO-WIDTH

Cabinet

FRONT

- **Thickness:**
23.8 mm
- **Width:**
42 mm, 54 mm,
68 mm, 80 mm
- **Lengths:**
2.45 m, 3.05 m,
3.35 m
- minimum yield 75%
for short and
medium cutting
lengths





STANDARD RIPPED-TO-WIDTH

Cabinet Colour

FRONT

- **Thickness:**
23.8 mm
- **Width:**
42 mm, 54 mm,
68 mm, 80 mm
- **Lengths:**
2.45 m, 3.05 m,
3.35 m
- minimum yield 75%
for short and medi-
um cutting lengths
- colour no defect





STANDARD RIPPED-TO-WIDTH

Prime Frame

FRONT

- **Thickness:**
23.8 mm
- **Width:**
48 mm, 50 mm
- **Lengths:**
2.45 m, 3.05 m,
3.35 m
- contains
predominantly
smaller defects
- designed to use at
high yield in
upholstery frames





Pollmeier STANDARD Ripped-To-Width
Beech. One Wood. So many possibilities.



The production site in Aschaffenburg is Europe's largest solid wood cutting plant.

Please contact us.
We are happy to support you in reducing your material costs.

sales@pollmeier.com
+49 36926 945 163

Our products are certified according to PEFC.

